



Intersection - inverted roof door area

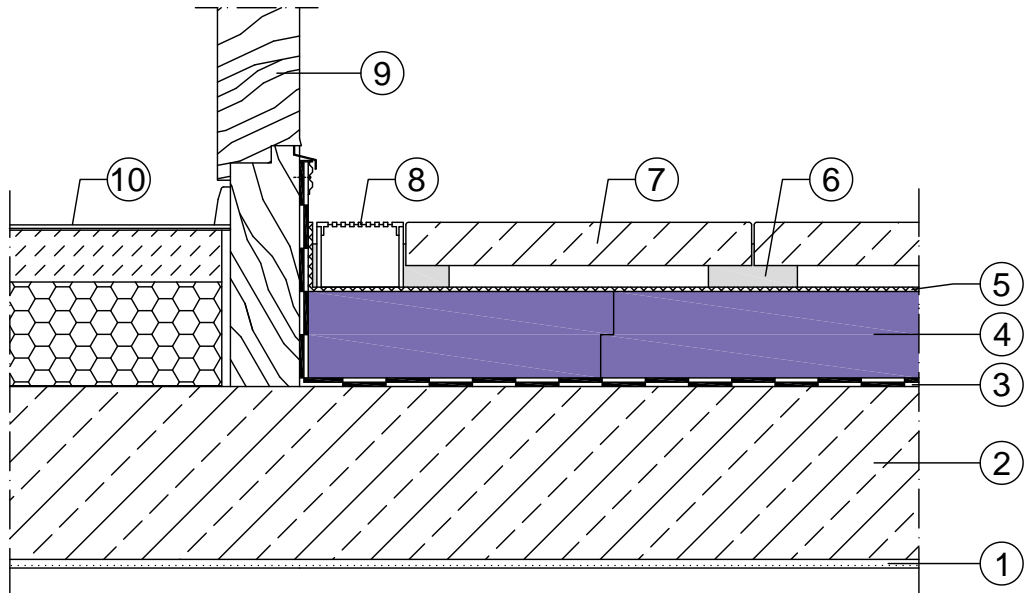

- ① Interior plaster
- ② Reinforced concrete ceiling
- ③ Double layer of waterproofing with primer
- ④ JACKODUR® Plus 300 Standard SF
- ⑤ JACKODUR® Filter layer WA
- ⑥ Pavement slab support
- ⑦ Reinforced concrete ceiling
- ⑧ Drainage channel with grating
- ⑨ Door element
- ⑩ Floor structure with floating screed

System	Roof	<p>Note: The information in this drawing represents our current state of knowledge and experience. They do not represent any guarantee in the legal sense of the term.</p> <p>When using these products, the specific conditions relative to the particular application must always be taken into account, especially with regard to structural physics, civil engineering and statutory building regulations.</p>	
Date	04/2018		
Detail	03-024		
			www.iackon-insulation.com