

JACKOBOARD® LIGNIN

New 2025



*Innovative bathroom design
with renewable resources*



Sustainable revolution in bathroom design

The innovation: **JACKOBOARD® LIGNIN** is crafted entirely from bio-based and recycled raw materials, marking a significant step forward in reducing CO₂ emissions.

This new generation of tileable construction boards contains renewable raw materials and is produced in an environmentally friendly way thanks to the utilisation of green electricity.


This makes **JACKOBOARD® LIGNIN** boards a responsible choice for environmentally conscious construction projects.



The advantages of JACKOBOARD® LIGNIN:

- with bio-based raw materials
- with recycled material
- CO₂ neutral produced core

Lignin: Nature's strength




The core of the construction board contains the biopolymer lignin. Lignin has long been underutilised as a sustainable raw material. It is abundantly produced as a byproduct of the paper industry during the breakdown of cellulose.

Lignin is a complex organic polymer predominantly found in the cell walls of plants.

It plays a vital role in forming the supporting tissue that provides plants their rigidity and structural strength.

In addition to lignin, the construction board core contains only recycled material. The use of recycled materials conserves valuable resources and significantly reduces the CO₂ footprint of our products.

The innovative combination of natural lignin and recycled material in the construction board core contributes to environmental protection thanks to its reduced CO₂ footprint.

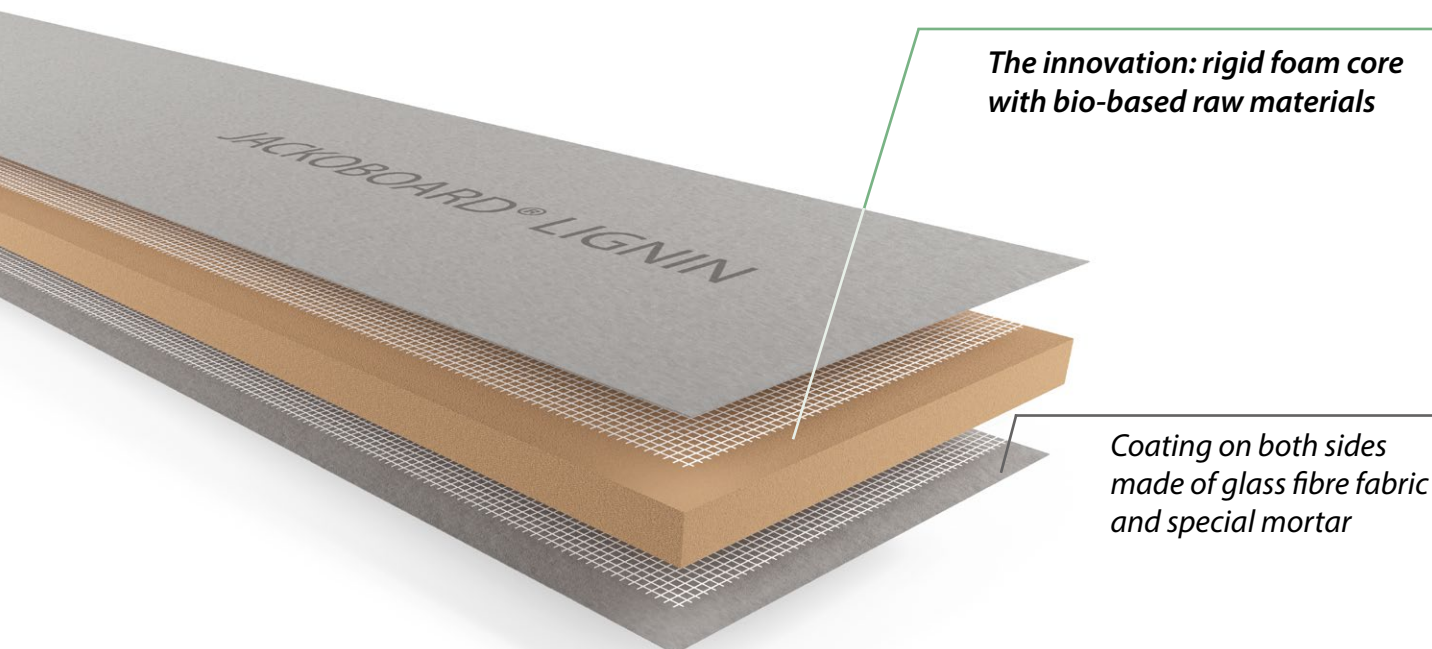

Oustanding Performance

*JACKOBOARD® LIGNIN stands out with its **CO₂-neutral foam core** while delivering the trusted advantages of JACKOBOARD® products: exceptional durability, waterproof and ideal for laying tiles - the perfect choice for modern construction projects.*



Can be directly tiled, filled and plastered



Easy to process



Water-repellent



High compressive strength




Lightweight
approx. 3-6 kg/m²



Excellent thermal
insulation properties
from $\lambda = 0,035 \text{ W}/(\text{m}\cdot\text{K})$

JACKOBOARD® LIGNIN Plano

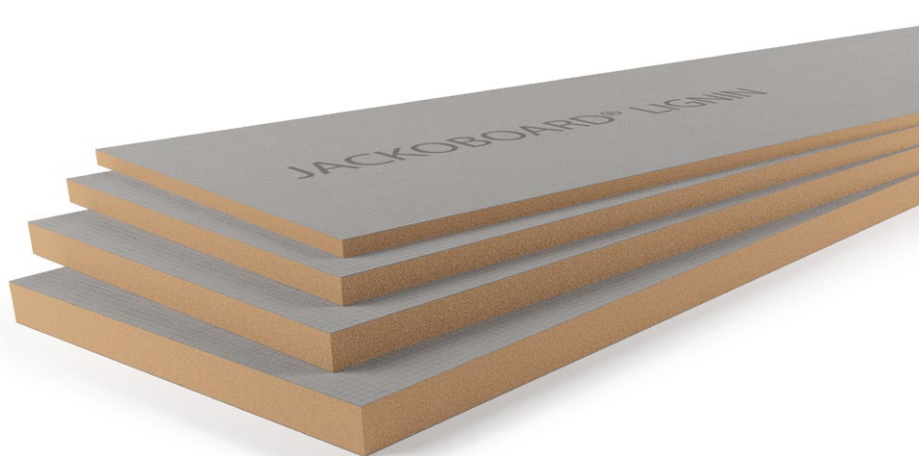

The all-round construction board

- Water-repellent construction board for interior fittings (wall, pipe and bath tub panelling, sink units, shelves etc.)
- Coating of mortar and glass fibre fabric on both sides
- Can be directly tiled, filled and plastered

Art. no.	EAN code	Thickness mm	Panel dimensions mm	Pack content boards	Pack content m ²
4529171	40 25345 17797 8	10	1300 x 600	100	78.00
4529172	40 25345 17798 5	12,5	1300 x 600	100	78.00
4528486	40 25345 17526 4	20	2600 x 600	50	78.00
4528487	40 25345 17527 1	30	2600 x 600	36	56.16
4528488	40 25345 17528 8	40	2600 x 600	36	56.16
4528489	40 25345 17529 5	50	2600 x 600	26	40.56

Note:

Our JACKOBOARD® LIGNIN range is constantly being expanded.

Do you have special wishes or requirements? Talk to us - together we will find the right solution.





Technical data

JACKOBOARD® LIGNIN Plano

Properties		Standard	Unit	Lignin- Polymer foam core
Bulk density		EN 1602	kg/m ³	> 30
Thermal conductivity λ		EN 12667	W/(m · K)	0.034
Compressive strength or compressive stress at 10 % compression		EN 826	N/mm ²	> 0.30 ¹
Dimensional change under defined conditions	70 °C Temperature 90 % relative humidity	EN 1604	%	≤ 5
	70 °C Temperature 40 kPa pressure	EN 1605	%	≤ 5
Linear thermal expansion coefficient		–	mm/(m · K)	0.07
Fire behaviour		EN 11925-2	-	E
Working temperature			°C	-50/+75

¹ 0,2 N/mm² for Plano in 20 mm

Properties		Standard	Unit	JACKOBOARD® LIGNIN Plano
Tensile strength		EN 1607	kPa	≥ 200
Tolerances	Width	EN 822	mm	± 2
	Length	EN 822	mm	± 2
	Rectangularity	EN 824	mm/m	≤ 5
	Flatness	EN 825	mm	≤ 2
Edge profile				butt edge

Disclaimer

The information in this publication is based on our current knowledge and experience. It does not constitute a warranty in the legal sense. The specific conditions of the application must always be taken into account, particularly with regard to building physics, building technology and building law.

Status 09/2025

JACKON Insulation GmbH


Carl-Benz-Straße 8
D-33803 Steinhagen

T +49 (0) 5204 9955 - 444

E info@jackodur.com

W www.jackon-insulation.com

Get **contact**



JACKON Insulation GmbH is a member
of the German Sustainable Building
Council (DGNB e.V.).



Reg. no. 067674

